



Pegler Yorkshire

CONNECT + CONTROL

TRV & Lockshield Pack with standard tail. Nickel Plate finish.

TRV & LS Pack



Size	Pattern No.	Pack 1 Qty	Pack 2 Qty	Code	Barcode	Price (£) ex VAT
10mm	TRV pack	1	10	42253	5022050422736	£18.88
15mm	TRV pack	1	10	42252	5022050422712	£18.63

Pegler Yorkshire Group Ltd, St Catherine's Ave, Doncaster, S Yorkshire, DN4 8DF
Telephone: Phone +44 (0) 844 243 4400 Fax: +44 (0) 844 243 9870 Website: www.pegleryorkshire.co.uk
Registered office : Pegler Yorkshire Group Ltd, St Catherine's Ave, Doncaster, S Yorkshire, DN4 8DF Company no : 00401507

Mistral II

Installation & Operating Instructions

INTRODUCTION

This thermostatic radiator valve (TRV) set has been produced to the highest quality standards and developed to offer the installer a suitable TRV that is for any application.

The bi-direction TRV is available as a single TRV or as a pack that includes a manual lockshield with or without drain-off facility.

INSTALLATION INSTRUCTIONS

Compression x compression TRV

The Mistral II bi-directional TRV body may be installed in either vertical or horizontal positions, in either flow or return. For best performance we recommend the valves be fitted with the headwork mounted vertically but where space is limited, the valve may be installed with the head mounted horizontally.

Installation procedures for Mistral II TRV bodies

Prior to installing the TRV bodies ensure the system is free from debris and contamination and installed in accordance with good plumbing practice. The white protective cap fitted on the valve body may be used as a temporary ON/OFF control device prior to fitting the thermostatic head.

Fitting thermostatic heads

Open thermostatic head to position 5 and position the head so the setting can be viewed and then hand tighten the securing ring. When installation is complete and the system is running normally, adjust the thermostatic head to the preferred setting for individual rooms then snap on the decorative cap.

(Only remove white protective cap from valve body immediately before fitting the thermostatic head).


OPERATING YOUR MISTRAL II TRV

Setting the TRV

Initially set the TRV to the required room temperature from the table in temperature settings e.g. Position 3 - 20°C. The TRV should be left for at least 1 hour to allow the temperature to stabilise. If a higher or lower room temperature is required simply adjust the setting accordingly and repeat the process.

Frost Protection

If you plan to be away from home for any length of time, the TRV can be turned to the frost protection setting " ❄️ ". If the temperature falls below 7°C the valve will automatically open, giving protection against freezing. (Provided that the boiler remains in operation, via a thermostat).

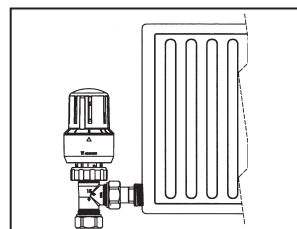


Mistral II TRV bodies

The TRV can be fitted as easily as a manual radiator valve.

To avoid the problem of hydronic (water flow) noise it is recommended that the differential pressure does not exceed 0.2 Bar. It is strongly recommended that an automatic bypass valve be fitted to any system fitted with TRV's.

The lockshield valve must also be set to control the water flow through the radiator to the correct level.

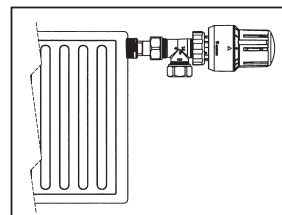

Removal of Radiator


The "0" Setting on the TRV is a positive "Off" position which will enable a radiator to be removed for maintenance purposes.

To avoid accidental operation of the valve or accidental damage whilst decorating the manual shut off cap may be used for added security instead of the TRV head. In this case, remove the TRV sensor head, by unscrewing the securing ring, and replacing with the manual cap and turning to the "Off" position BEFORE removing the radiator.

TEMPERATURE SETTINGS

There are 8 positions on the TRV headwork

These temperatures will vary slightly, depending upon nature of installation.

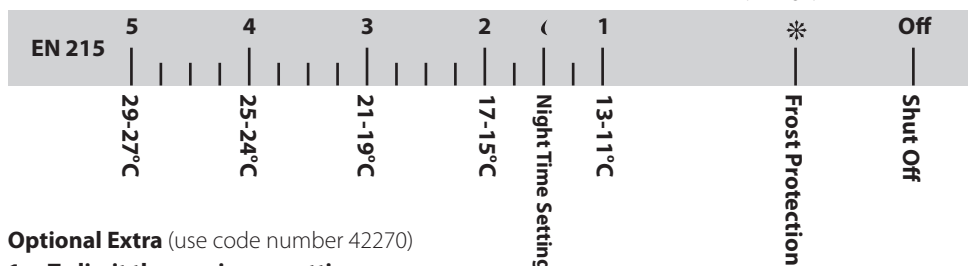

Optional Extra (use code number 42270)

1. To limit the maximum setting.

Remove the head and set to the maximum desired position. Insert the 'Locking Pin' under the base, one segment to the right of LOCK position. [A slight rotation of the head may be required to allow full insertion of the Locking Pin] The temperature has now been limited to the desired position.

2. To lock a pre-determined setting.

Set to the desired locking position.

Insert the 'Locking Pin' under the base, into the segment in line with the LOCK position. [A slight rotation of the head may be required to allow full insertion of the Locking Pin] The desired set temperature is now locked in place.



Mistral II Lockshield Radiator Valves

Compression x compression

Both ends of the 15 x 1/2" Mistral II valve body are threaded 1/2" BSP enabling this size of valve to be fitted to the tailpipe in the radiator either vertically or horizontally.

N. B. In the event that a radiator needs to be removed e.g. for decoration purposes, remove the lockshield top and rotate the spindle using a small adjustable spanner turning clockwise to the closed position.

Technical Data

Temperature Range	7°C - 28°C
Maximum Test Pressure	20 bar
Maximum Static Pressure	10 bar
Nominal Flow Rate	195kg/h

Technical Data

Maximum Differential Pressure	0.6 bar
Maximum Water Flow Temperature	120°C

Please Note: For further information, please contact our technical department: 0870 120 0285

For further information, please contact your appropriate Sales Officer:

Head Office Sales - Tel: 0113 270 6945 / 0113 272 5380 • Fax: 0113 270 5644 / 0113 272 5385

Northern Ireland - Tel: 028 9070 6990 • Fax: 028 9070 6999

Export - Tel: +44 (0) 113 270 110 • Fax: +44 (0) 113 271 6250

Keymark Licence

No. 003 – CCC3 – E00002



BSI hereby grants to:

*Pegler Yorkshire Group Limited
Belmont Works
St Catherine's Avenue
Doncaster
South Yorkshire
DN4 8DF
United Kingdom*

In respect of:

EN 215 Thermostatic Radiator Valves

The right and licence to use the CEN/CENELEC Keymark in accordance with the CEN/CENELEC Internal Regulations part 4 Certification: The CEN/CENELEC European Mark System, governing the use of the Keymark, which may be periodically updated by CEN/CENELEC and the Specific CEN Keymark Scheme Rules for Thermostatic Radiator Valves. The Keymark is authorized to be affixed to products manufactured at the above address and in conformity with the stated European Standards detailed on the following page(s).

For and on behalf of BSI

Gary Fenton, Global Assurance Director

First granted 28 April 1995

Latest Issue 21 November 2012

This Licence remains the property of BSI and shall be returned immediately upon request.
The Licence does not expire. To check validity telephone +44 (0)845 080 9000

The British Standards Institution, Kitemark Court, Davy Avenue, Knowlhill, Milton Keynes, MK5 8PP
Tel: +44 (0)845 080 9000 Web: www.bsigroup.com

A certification body empowered by CEN No. 003 for the granting of the licence to affix the Keymark.

Note:

The Keymark may not include compliance with specific product legislation that exists in some countries.

Keymark Licence

No. 003 – CCC3 – E00002

*Pegler Yorkshire Group Limited
Doncaster
UK*

EN 215 Thermostatic Radiator Valves



EN 215: SPECIFICATION FOR THERMOSTATIC RADIATOR VALVES

TERRIER II TWO WAY

THERMOSTATIC RADIATOR VALVE / SENSOR HEAD INTEGRAL

TERRIER II TWO WAY CHROME

THERMOSTATIC RADIATOR VALVE / SENSOR HEAD INTEGRAL

BELMONT

B1301-0/4 THERMOSTATIC RADIATOR VALVE / SENSOR HEAD INTEGRAL
B1401-0/4 THERMOSTATIC RADIATOR VALVE / SENSOR HEAD REMOTE
B1701-0/4 THERMOSTATIC RADIATOR VALVE / SENSOR HEAD REMOTE

MISTRAL II

THERMOSTATIC RADIATOR VALVE / SENSOR HEAD INTEGRAL

MISTRAL II CHROME

THERMOSTATIC RADIATOR VALVE / SENSOR HEAD INTEGRAL

Keymark Licence

No. 003 – CCC3 – E00002

Pegler Yorkshire Group Limited
Doncaster
UK



EN 215

Thermostatic Radiator Valves

EN 215: SPECIFICATION FOR THERMOSTATIC RADIATOR VALVES

VALVE BODY:

DESIGNATION	SERIES	NOMINAL SIZE
15mm ANGLE UNIVERSAL	GB	DN15 _{FF}
15mm STRAIGHT	GB	DN15 _{LL}
1/2/15mm ANGLE UNIVERSAL	*	DN15 _{FF}
VB 1290/4	*	DN15 _{FF}
VB 1290/4P	*	DN15 _{FF}
VB 1290/4	*	DN20 _{FF}
VB 1290/4P	*	DN20 _{FF}
VB 1390/4	*	DN15 _{FF}
VB 1390/4P	*	DN15 _{FF}
VB 1390/4	*	DN20 _{FF}
VB 1390/4P	*	DN20 _{FF}
VB 1490/4	*	DN15 _{LL}
VB 1490/4P	*	DN15 _{LL}
VB 1490/4	*	DN20 _{LL}
VB 1490/4P	*	DN20 _{LL}

MISTRAL:

15mm ANGLE MISTRAL	GB	DN15 _{FF}
15mm PUSH FIT	GB	DN15 _{FF}
15mm STRAIGHT	GB	DN15 _{FF}
VB 1290/4 PF	*	DN15 _{FF}
VB 1490/4 PF	*	DN15 _{LL}
VB 1390/4 PF	*	DN15 _{FF}