

Technical Datasheet

C02 SLATE DRY VERGE



Product Details

The Kytun Slate DryVerge System permanently secures slate applications on gable ends protecting the verge from wind uplift and rain.

The Slate Dry verge System can be used with both interlocking slates and double lap natural or fibre cement slates.

The components are manufactured from high grade pre-primed polyester coated aluminium.

Product Features


- Provides full wind uplift and rain protection.
- Patented 'Drip System' which allows for self drainage of rain water into the gutter.
- Extremely easy and quick to install.
- Requires no maintenance once installed.
- Can be fully customised.
- Extensive range of colours available.

Dimensions

C02 Slate Trim Type 2 Aluminium

Overall length: 3050mm

■ Natural Slate ■ Standard Slate

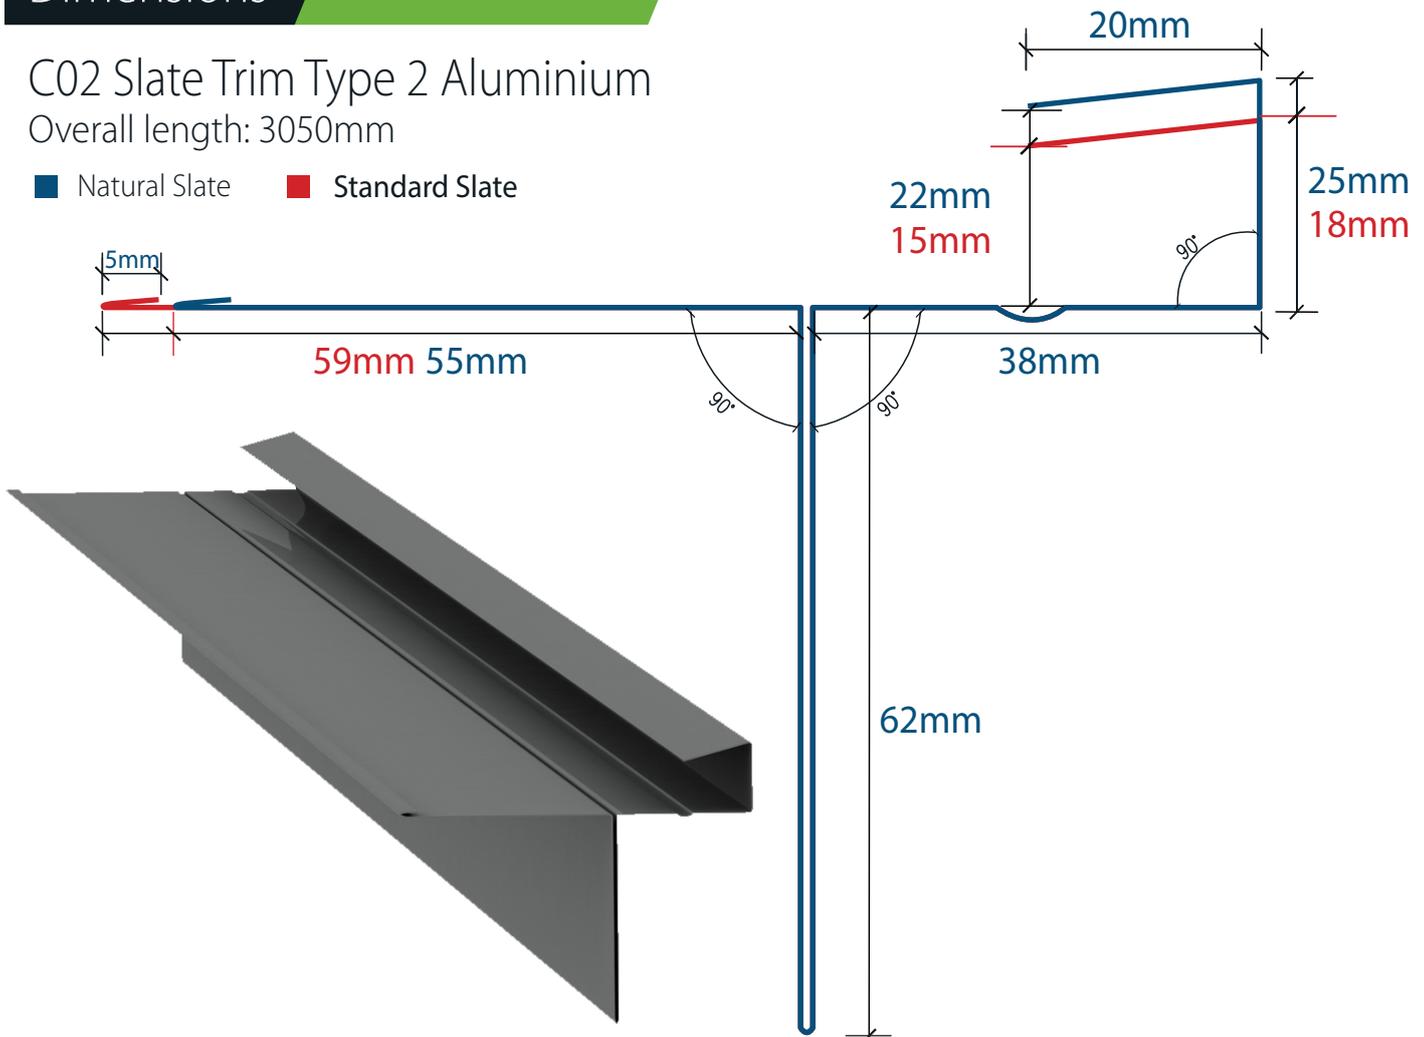

Keenaghan
Kilmacrenan
Letterkenny
Co. Donegal
Ireland.

T: +353 (0) 7491 39500
F: +353 (0) 7491 39519
Email: info@nwa.ie
Accounts: accounts@nwa.ie
Sales: sales@nwa.ie

For a full list of products visit us on:
www.nwa.ie