

Technical Datasheet


LEAD CHIMNEY TRAY



Product Details

Our Lead Chimney Trays are designed to prevent water penetration into the building through the chimney stack. Lead Chimney Trays are fitted during the construction of the chimney.

NWA Lead Chimney Trays come in single and double size's. If you can't see the Tray you require please contact us with your requirements and we will quickly get back to you with a bespoke solution to your needs. We can produce any size.

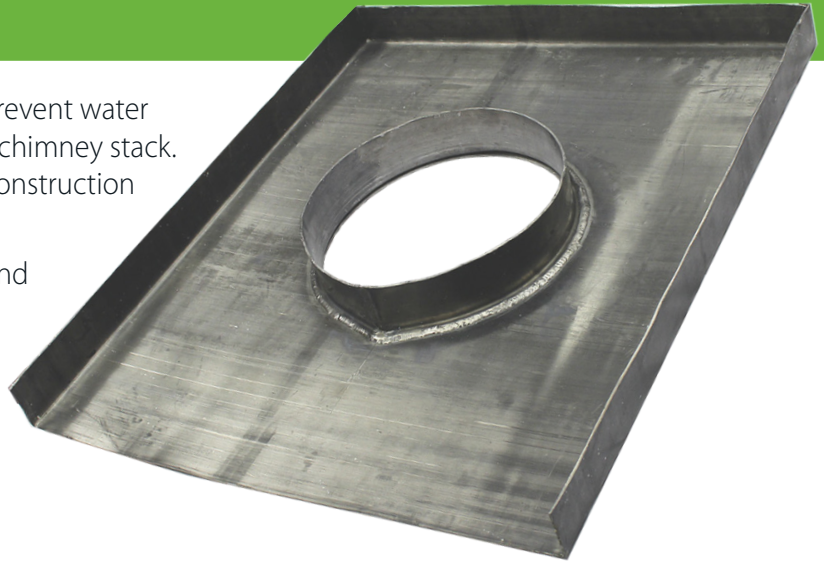

LEAD CHIMNEY TRAYS

LCT01	Single Lead Chimney Tray
LCT02	Double Lead Chimney Tray

Features & Benefits

- Designed to collect water that penetrates the chimney.
- Suitable for new build or refurbishment work.
- Made from code 4, a material with proven characteristics to perform at the highest level in one of the most venerable parts of the building.

Uses

- For brick or block chimney stacks.
- To stop water entering the building around a chimney.
- Where the chimney penetrates a pitched roof.
- Complies with current Building Regulation requirements.

Installation

- Regardless of the location of the chimney on the roof, the lead tray should be installed minimum of 150mm above the lowest point of intersection with the roof.
- The tray should be bedded in a thin layer of mortar. The front section of tray is then folded down over block/brickwork to create apron.

