
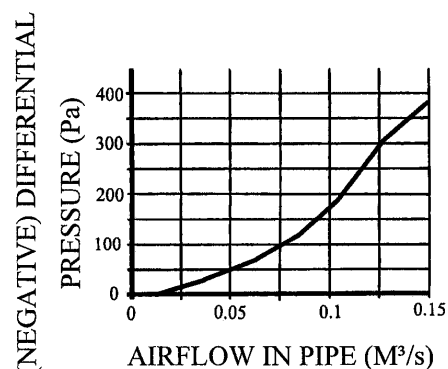
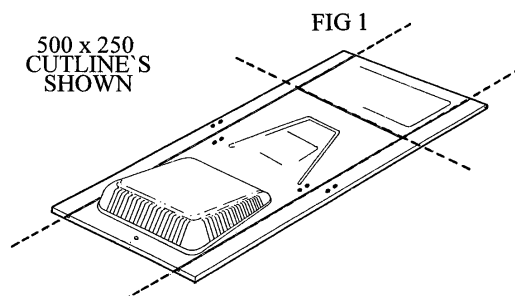


Slate Vent General Fitting

CODE GRSV 30/25
GRSV 30/25R

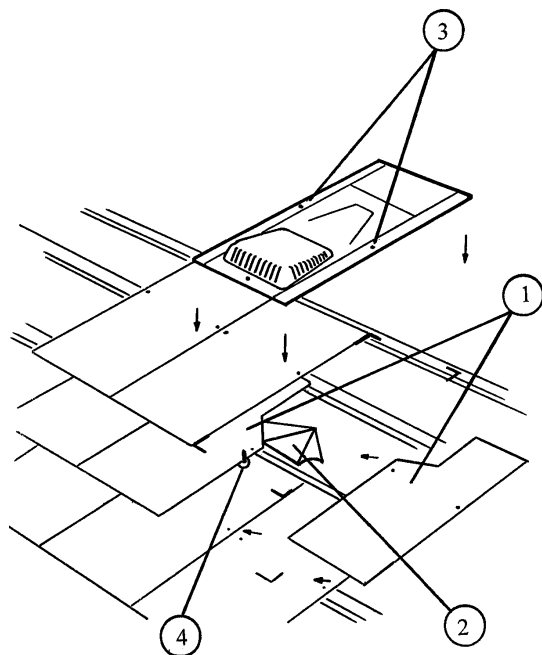

Fitting Instructions:

The GRSV30/25 or GRSV30/25R slate vents take the place of one standard slate.

For 500 x 250 slates trim slate vent along marked lines (fig1).

- 1) Cut the two slates directly below the slate vent as shown.
- 2) Cut an inverted "T" in the felt and fold back as shown.
- 3) Fix slate vent into position using holes provided.
- 4) Secure front of slate using a copper disc rivet. A GRPA Flexible Pipe is available for connection to the GRSV30/25 Slate Vent Spigot.

Slate Vent Airflow Characteristics:

| Airflow m³/s | Differential airflow pressure (Pa) |
|--------------|------------------------------------|
| 0.037 | 28 |
| 0.060 | 64 |
| 0.083 | 122 |
| 0.109 | 190 |
| 0.130 | 310 |

| PRODUCT CODE | TO ACHIEVE 5mm² FREE AIR FLOW THE VENT NEEDS TO BE FITTED AT CENTRES | TO ACHIEVE 10mm² FREE AIR FLOW THE VENT NEEDS TO BE FITTED AT CENTRES | TO ACHIEVE 25mm² FREE AIR FLOW THE VENT NEEDS TO BE FITTED AT CENTRES |
|--------------|--|---|---|
| GRSV 30/25 | 2m | 1m | 400mm |
| GRSV 30/25 | 2m | 1m | 400mm |

MANTHORPE BUILDING PRODUCTS LTD
MANTHORPE HOUSE
BRITAIN DRIVE
CODNOR GATE BUSINESS PARK
RIPLEY
DERBYSHIRE DE5 3ND

TEL: 01773 514 200
FAX: 01773 514 262
EMAIL: sales@manthorpe.co.uk
WEB: www.manthorpe.co.uk

DRN M.L.W.O

Date 01.08.03

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No

MBP 8083

Issue

A