

Madison Slabs



SCAN HERE

Combine modern and traditional aesthetics.

Madison slabs are a perfect choice for creating public projects that excel in form and function. Available in a pack of 5 mixed sizes, these slabs allow for a variety of distinct laying patterns that give each public space a fresh, organic look.

- Mixed size packs for design versatility
- Smooth surface, defined modern edges
- Perfect for public projects with modern and traditional elements

PrimeTop®

R Riven Finish	 Pedestrian Use	 Light Traffic
Refer to relevant guidance in BS 7533		



600 x 450mm



600 x 300mm



450 x 450mm



450 x 300mm



300 x 300mm

Mixed Length Sizes
All sizes in one pack



50mm

Depths

Madison Slabs



Specification



Product type	Concrete Paving Slab
Manufactured to	BS EN 1339:2003
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >350kgs/m ³ cement
Chamfer	Fettled
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Bending Strength	Typical tensile splitting strength of >5MPa (Class 3)
Slip/Skid Resistance	Mean polished skid resistance value (PSRV) >45 Mean unpolished skid resistance value (USRV) >45
Installed to	BS 7533-102:2025
Tolerances on Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm
Abrasion Resistance (mm)	≤ 23mm (Wide Wheel Abrasion Test) Class 3
Durability (Freeze-thaw)	≤ 1.0 kg/m ² as a mean with no individual value > 1.5 kg/m ² Class 3
External Fire Performance	Deemed to satisfy when used for roofing
Reaction to fire	Class A1
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design for your application. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 12%
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
breem rating www.bre.co.uk	A , according to the Green Guide to Specification, 4 th Edition 2009. A+ can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411


Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

v1.3

Madison Slabs

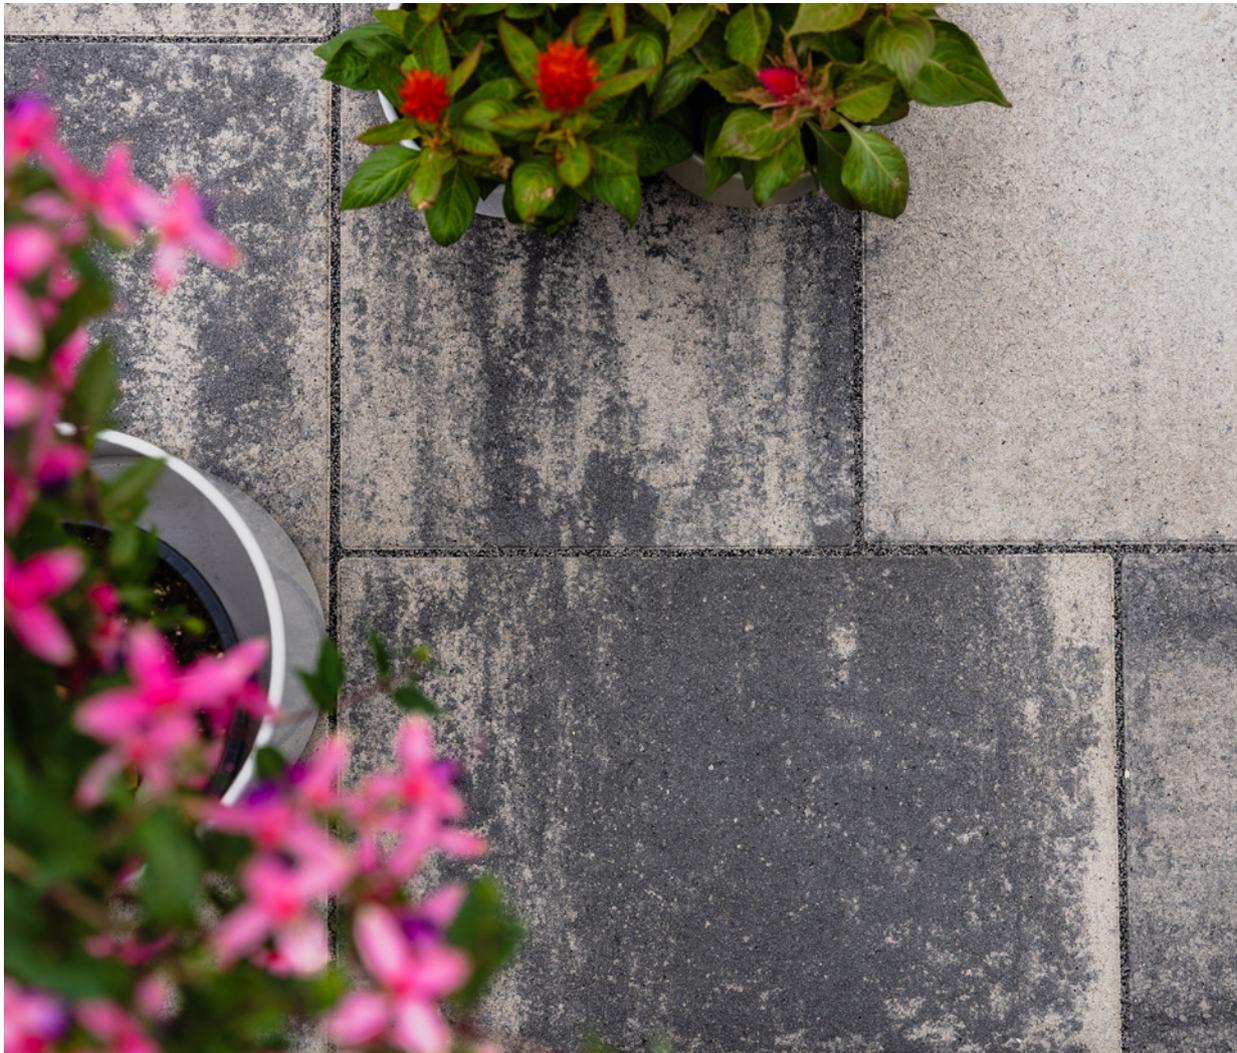

Stock

product	size (mm)	edge	colours available	in stock	m ² per pack	m ² per slice	no. per pack	no. per pallet	weight kg per pack GB	weight kg per pack NI/ROI
Madison Slabs (all sizes in one pack)	600 x 450 x 50	Chamfered	Slate	YES	14.04	1.08	13	78	1596	1596
	600 x 300 x 50						13			
	450 x 450 x 50						26			
	450 x 300 x 50						13			
	300 x 300 x 50						13			

Slate

