

## HIGHWAY™



D400

BS EN 124



HA104/09



Illustrated: DMTOD4/6767/KH

## Highway

### D400 & HA104/09 Manhole Covers

Designed and manufactured to meet the enhanced requirements of Highways England's HA 104/09 specification. The Highway range of access covers and gully grates exceed BS EN 124 requirements and include patented safety and specific design features required by Highways England.



Illustrated: DMTOD4/9060/KH



Illustrated: DMTOD4/9090/KH



Illustrated: DMTOD4/1267/KH

Available options:

- Locked
- Badged (e.g. 'SW', 'FW' etc.)
- Ventilation Holes
- Sealing Plate
- Safety Grill
- Anti-slip Coating (60+ PSRV)

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice. It is the responsibility of all users to satisfy themselves the above data is current.
2. Installation details are available on request.
3. Published September 2016 - Version 2.AC



SCAN QR  
CODE FOR  
MORE INFO



WREKIN PRODUCTS STOCK CODE	ITEM DESCRIPTION	CLEAR OPENING (C x D mm)	BASE OPENING (F x G mm)	OVERALL FRAME (A x B mm)	FRAME DEPTH (E mm)
DMTOD4/4545/KH	450 x 450 x 100mm Double Tri Cover, Group 4	450 x 450	474 x 474	664 x 664	100
DMTOD6/4545/KH	450 x 450 x 150mm Double Tri Cover, Group 4	450 x 450	474 x 474	664 x 664	150
DMTOD4/6045/KH*	600 x 450 x 100mm Double Tri Cover, Group 4	600 x 450	624 x 474	814 x 664	100
DMTOD6/6045/KH*	600 x 450 x 150mm Double Tri Cover, Group 4	600 x 450	624 x 474	814 x 664	150
DMTOD4/6060/KH	600 x 600 x 100mm Double Tri Cover, Group 4	600 x 600	622 x 622	810 x 810	100
DMTOD6/6060/KH	600 x 600 x 150mm Double Tri Cover, Group 4	600 x 600	622 x 622	810 x 810	150
DMTOD4/6767/KH	675 x 675 x 100mm Double Tri Cover, Group 4	675 x 675	697 x 697	885 x 885	100
DMTOD6/6767/KH	675 x 675 x 150mm Double Tri Cover, Group 4	675 x 675	697 x 697	885 x 885	150
DMTOD4/7560/KH	750 x 600 x 100mm Double Tri Cover, Group 4	750 x 600	774 x 624	964 x 814	100
DMTOD6/7560/KH	750 x 600 x 150mm Double Tri Cover, Group 4	750 x 600	774 x 624	964 x 814	150
DMTOD4/7575/KH	750 x 750 x 100mm Double Tri Cover, Group 4	750 x 750	775 x 775	965 x 965	100
DMTOD6/7575/KH	750 x 750 x 150mm Double Tri Cover, Group 4	750 x 750	775 x 775	965 x 965	150
DMTOD4/9060/KH	900 x 600 x 100mm Double Tri Cover, Group 4	900 x 600	924 x 624	1115 x 815	100
DMTOD6/9060/KH	900 x 600 x 150mm Double Tri Cover, Group 4	900 x 600	924 x 624	1115 x 815	150
DMTOD4/9090/KH	900 x 900 x 100mm Double Tri Cover, Group 4	900 x 900	927 x 927	1130 x 1130	100
DMTOD6/9090/KH	900 x 900 x 150mm Double Tri Cover, Group 4	900 x 900	927 x 927	1130 x 1130	150
DMTOD4/1267/KH	1220 x 675 x 100mm Double Double Tri Cover, Group 4	1220 x 675	1245 x 700	1460 x 895	100
DMTOD6/1267/KH	1220 x 675 x 150mm Double Double Tri Cover, Group 4	1220 x 675	1245 x 700	1460 x 895	150


\* Call for more details

01543 440440

wrekinproducts.com



## Dimensions:

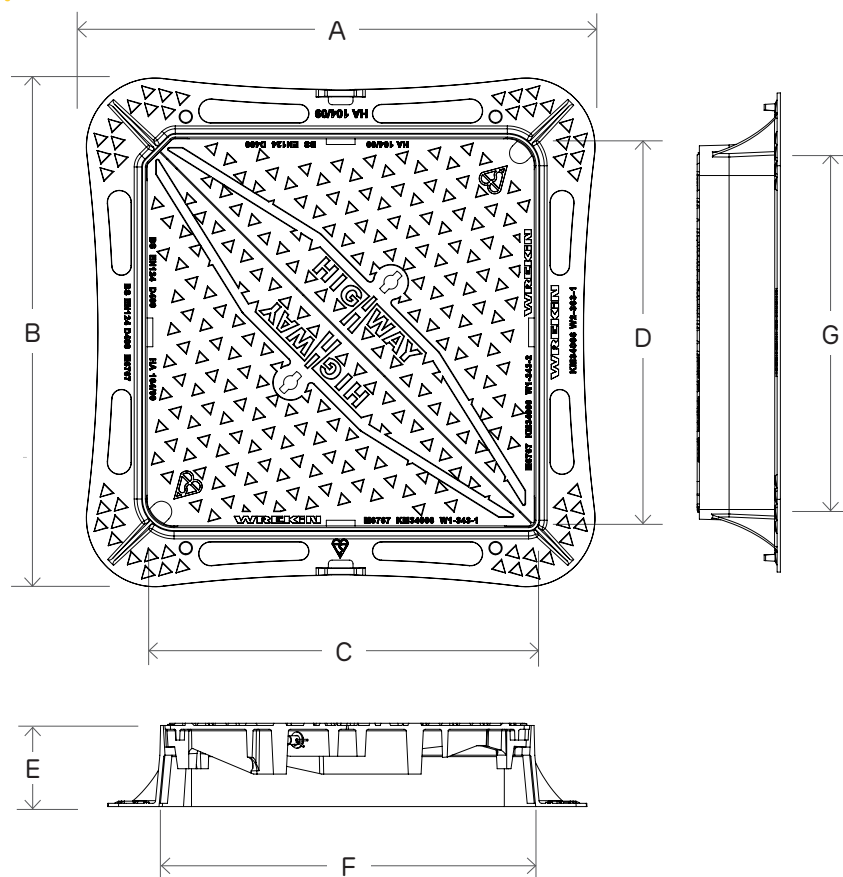

**WREKIN**

Intelligent products for civil engineering

### Diagram Key

A x B Overall Frame Size

C x D Clear Area

F x G Base opening

E Frame Height

- For use in a Group 4 D400 class environment
- Compliant with BS EN 124
- Complies with Highways England specification HA 104/09
- Third party certified by BSI
- Enlarged frame corners help to dissipate the load
- Non rock - Three point suspension for non rock stability
- Safety keyway - Ensures key's secure in keyway when lifting
- Indexed covers ensure correct fitting
- Manufactured from strong and highly durable ductile iron
- Mechanical lifting points